

Type: **M22–K01** Article No.: **216378**



Ordering information		
Connection technique	Screw terminals	
Description	Front fixing	
Auxiliary contacts: = safety function, by positive opening to IEC/EN 60947–5–1 N/C = Normally closed	1 N/C	


Contact sequence



Contact travel diagram, stroke in connection with front element

0	1.2	5.5

Configuration



Notes concerning the table header

\ \ \

x = sequence number on fixing adapter

y = function number on contact element


Assignment: Assignment of the fixing adapter with sequence numbers according to EN 50013

General

Standards			IEC/EN 60947 VDE 0660
Lifespan, mechanical	Operations	× 10 ⁶	> 5
Operating frequency	Operations/h		3600
Operating force		n	5
Operating torque (screw terminals)		Nm	0,8
Degree of protection, IEC/EN 60529			IP 20
Climatic proofing			Damp heat, constant, according to IEC 60068–2–78 Damp heat, cyclical to IEC 60068–2–30
Ambient temperature			
Open		°C	-25/70
Mounting position			As required
Mechanical shock resistance to IEC 60068–2–27Shock duration 11 ms, half–sinusoidal		g	> 30
Terminal capacities			
Solid		mm ²	0.75 – 2.5
Stranded		mm ²	0.5 - 2.5
Contacts			
Rated impulse withstand voltage	U _{imp}	V AC	6000
Rated insulation voltage	Ui	V	500
Overvoltage category/pollution degree			III3
Control circuit reliability			
at 24 V DC/5 mA	H _F	Fault probability	$< 10^{-7}$, < 1 fault in 10^7 operations
at 5 V DC/1 mA	H _F	Fault probability	$< 5 \times 10^{-6}$, < 1 fault in 5 × 10^{6} operations
Max. short–circuit protective device			
Fuseless		Туре	PKZM0-10/FAZ-B6/1
Fuse	gG/gL	Α	10
Switching capacity			
Rated operational current			
· · · · · · · · · · · · · · · · · · ·			
AC-15			
·	l _e	A	4
AC-15	l _e l _e	A A	4

400 V	l _e	Α	2		
500 V	l _e	Α	2		
DV-13					
24 V	<i>l</i> e	Α	3		
42 V	<i>l</i> e	Α	1,7		
60 V	l _e	Α	1,2		
110 V	l _e	Α	0,8		
220 V	<i>l</i> e	Α	0,3		
Lifespan, electrical					
AC-15					
230 V/0.5 A	Operations	× 10 ⁶	1,6		
230 V/1.0 A	Operations	× 10 ⁶	1		
230 V/3.0 A	Operations	× 10 ⁶	0,7		
DV-13					
12 V/2.8 A	Operations	× 10 ⁶	1,2		
Dimensions					

Dimensions

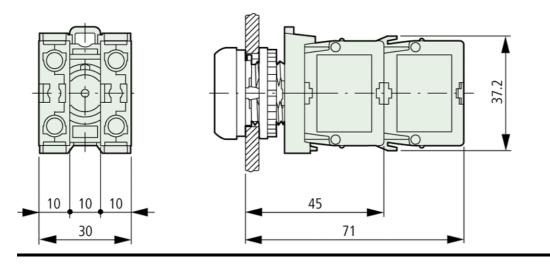

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn E-Mail: catalog@moeller.net, Internet: www.moeller.net, http://catalog.moeller.net Copyright 2006 by Moeller GmbH. Subject to modifications. HPL-C2006GB-INT V2.3