

TECHNICAL INFORMATION

LOKI

8W 4000K BRANCO

Downlight dimável de encastrar em alumínio ADC12 com ótima dissipação de calor, anticorrosão e proteção IP54. Alta eficiência (Cob 120lm/w) e fácil instalação através do seu conector rápido.

Dimmable Recessed Downlight with made of ADC12. Aluminium with great heat dissipation, anti corrosion and IP54 Protection. High in efficiency (Cob 120lm/w) and easy in installation as it comes with fast connector.

Downlight Empotrable Regulable fabricado en Aluminio ADC12 de gran disipación de calor, anticorrosión y Protección IP54. Alta eficiencia (Cob 120lm / w) y fácil instalación ya que viene con conector rápido.




ILAR-00995


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00995	Lenght	Ø95mm	Total Luminous Flux	640lm
Led Type	Edson	Width	-	Luminous Efficacy	80lm/w
Mounting Type	Recessed	Height	36.5mm	Beam Angle	60°
Body Material	Aluminum	Cutout	Ø83mm	Colour Temperature	4000K
Housing Colour	White RAL9016	Packaging Unit	-	Colour Rendering Index	>80
Body Shape	Round	Gross Weight	-	Colour Consistency	-
Nominal Lifetime (EOL end of life)	50.000H	Volume	-	UGR	-
Dimmable	YES				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	8W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP54	ROHS	YES
Power Factor	≥0.9	Protection Class	II	ENEC	-
Operating Temperature	-20°C to +45°C	Protecion Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

SIZE

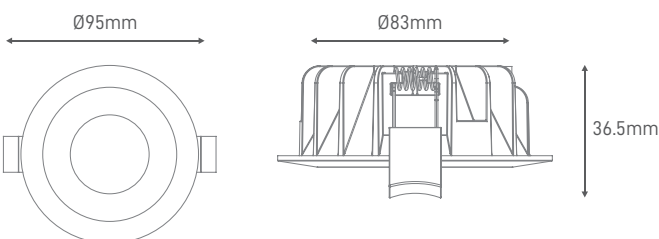

BEAM ANGLE



Designed by Aron Light in Portugal. Made in PRC

